SAIL

Howo

SHACMAN

SAIL

Integrity,Responsibility-Confidence

Guangzhou Sail Technology co.,Ltd
Phone: +86 153 6126 9988 Email: sail@sailauto.net
Address: Room 401, No. 3 Shafeng Third Road, Baiyun District, Guangzhou, China (Area B425)
Official Website: https://www.sailautoparts.com

WE SINCERELY INVITE GLOBAL PARTNERS TO VISIT OUR COMPANY, DISCUSS COOPERATION, AND WORK TOGETHER FOR A BETTER FUTURE.

MAIN CATEGORIES

Flatbed semi-trailer

Skeleton semi-trailer

Lowbed semi-trailer

Fuel tanker semi-trailer

Side curtain semi-trailer

Cement mixer semi-trailer

Refrigerated semi-trailer

Dump semi-trailer

LOADING: 2 UNITES / 45' HQ CONTAINER

FLATBED SEMI-TRAILER

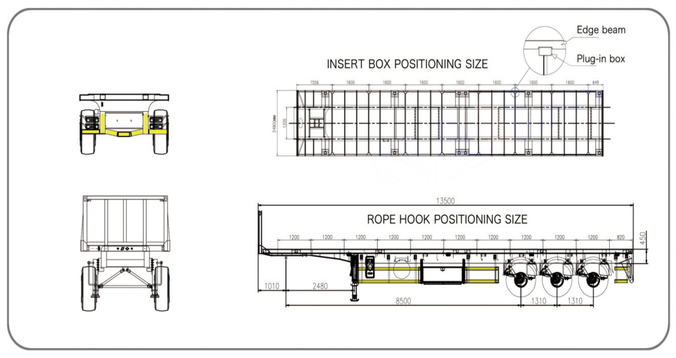

Specification

Sail 13.5m Flatbed Semi-trailer

Model (Dwg No.)		SL409011
Parameter	Dimension(mm)	Length×Width×Height:13,500x2500x2630mm
	King pin setting(mm)	1100mm from the face of front bloster
	Fifth wheel height(mm)	1130
	Axle space(mm)	8210+1320+1320
	Tare weight (kg)	6800(+/-3%)
	Payload (kg)	40000
Structure	Main beam(mm)	450mm, submerged arc welding
	Flange and web(mm)	10/12/16mm, Q700
	Side rail	160mm hot roller "C" type channel.
	Cross member	105mm fabricated C channel, W type
	Floor	3mm thick diamond plate
	Lock	12 retractable container locks
	Kingpin Plate	10mm
	Rope winches and lashing hooks	7 rope winches on each side /10 lashing hooks on each side
	Side guard	Aluminum side guard
	Tool box	1 unit, steel box, 1.5mm. galvanization, Color: Silver
	Kitchen box	1 unit steel box, 1.5mm. galvanization, Color: Silver
	Front Wall	1.23m high
	Fire extinguisher box	4 unit, can fits 4-8KG
	Water tank	1 unit, 190L with faucet, in the middle position
OEM	Landing gear	Sail 28T,
	Kingpin	2 inch bolted type
	Brake system	"WABCO"twin lines air brake system, with 4S/2M ABS.
	ABS	"WABCO"4S/2M
	Electric system	24-volt lighting system, 7-way receptacle, ISO standard,
	Axle & Suspension	SAIL3×12Ton manual slack adjusters. One liftable front axle
	Tire	7 pieces of 385/65 R 22.5 tires, HANKOOK brand.
	Rim	7 pieces of 11.75-22.5 steel wheels
	Spare tire carrier	1 unit
	Painting	Shot blast at Standard SA 2.5 prior to application of primer Total DFT not less than 80um

DETAIL OF SEMI-TRAILER

▲ FIRE EXTINGUISHER & TOOL BOX

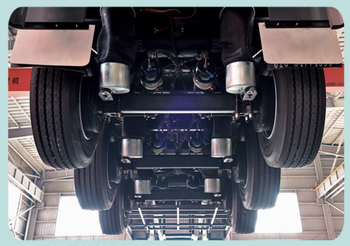

▲ AIR SUSPENSION

▲ SIDE GUARD & STORAGE RACK

▲ REAR LADDER

▲ SPARE TIRE CARRIER

▲ JOST LANDING GEAR

▲ KITCHEN BOX

▲ RIM & TIRE